



POLE POSITION 100

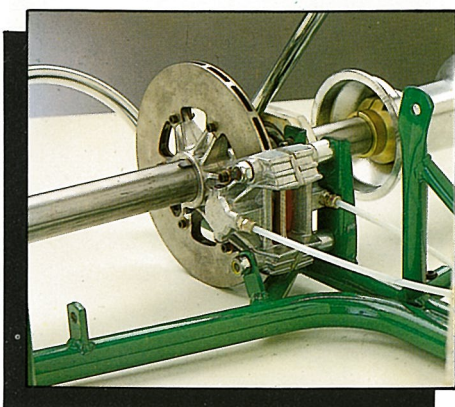

OMOLOGAZIONE CIK 005

Telaio CR-MO Ø 30-28
3 cuscinetti assale
Assale Ø 40 forato
Serbatoio lt. 8
Freno idraulico a doppio
circuito
Disco freno autoventilante
Ruote monopezzo
Regolazione altezza anteriore
e posteriore del telaio

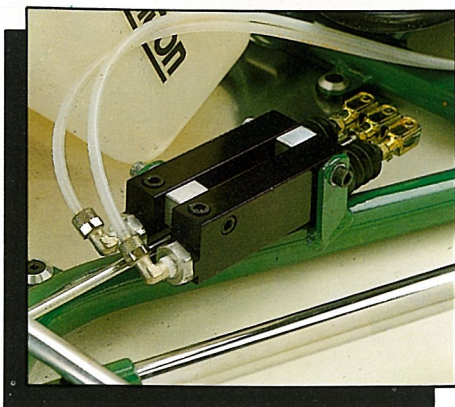

CIK HOMOLOGATION 005

*Chassis CR-MO Ø 30/28
3 axle bearings
tube axle Ø 40
8 lt. fuel tank
double circuit hydraulic brake
system, self-ventilated brake
disk
adjustable rear and front chassis
height
one-piece wheel rims.*



TONY//KART